




www.evotech-performance.com


Suzuki Hayabusa Tom Tom Satnav Mount Installation Instruction




- Ⓐ 1 x Main Plate
- Ⓑ 1 x Pivot Plate
- Ⓒ 1 x Sub Mounting Bracket
- Ⓓ 2 x M5 x 8mm Black Button Head Bolts
- Ⓔ 2 x Locking Washer
- Ⓕ 2 x M5 Black Washer
- Ⓖ 2 x M5 x 12 Caphead Bolt
- Ⓗ 4 x M4 x 12mm Black Button Head Bolts
- ⒶⒶ 2 x M8 x 50mm Caphead
- ⒷⒷ 2 x Spacer


EVOTECH[®]
P E R F O R M A N C E

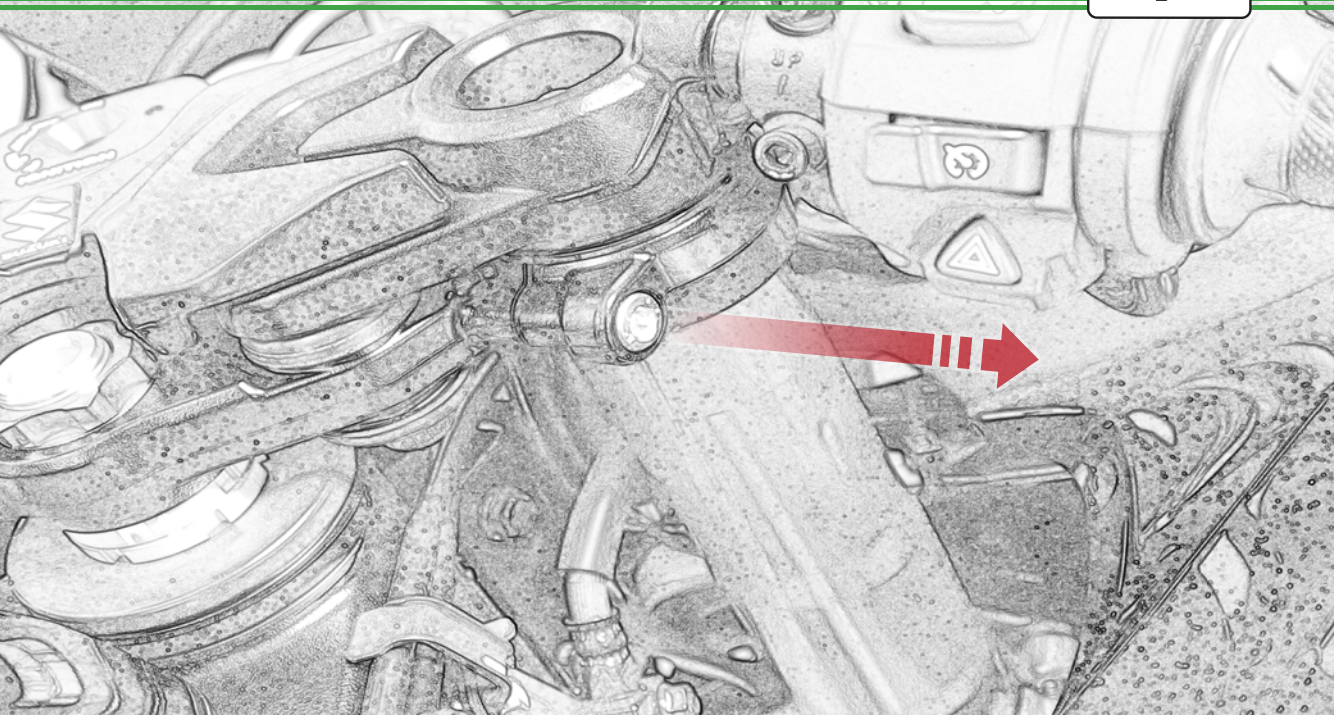


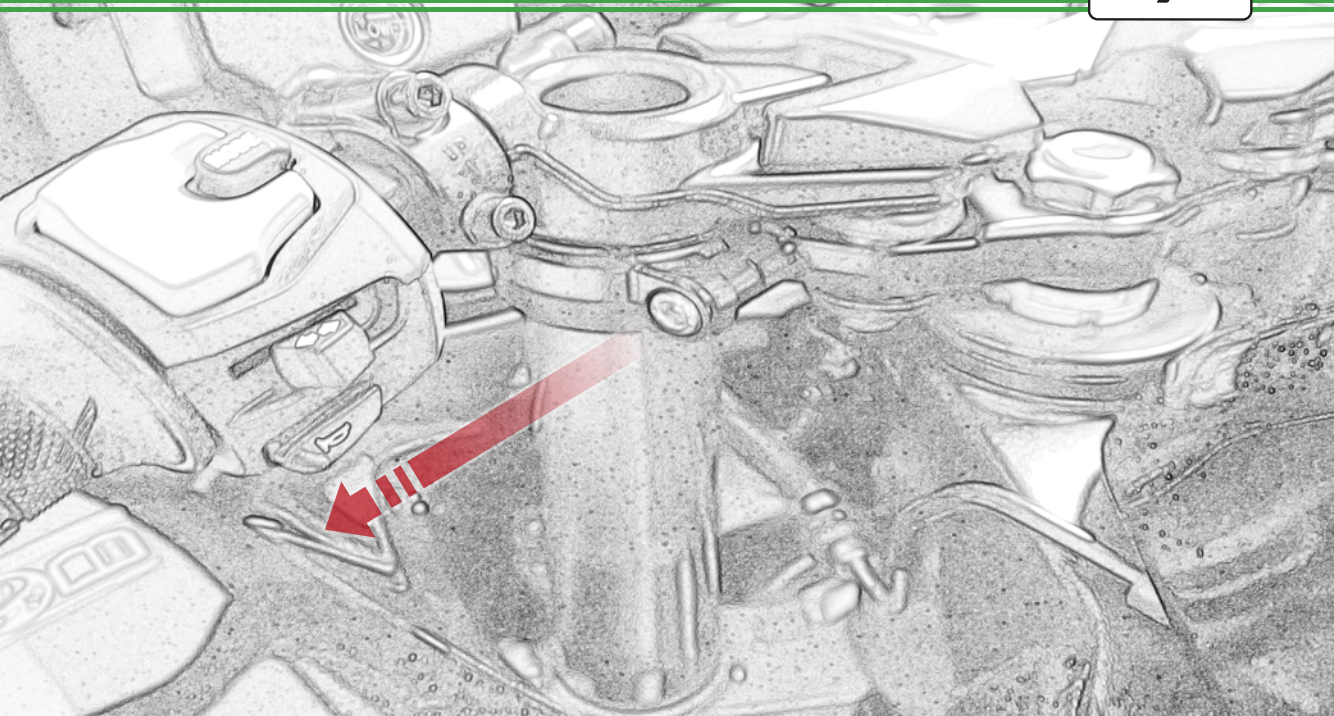

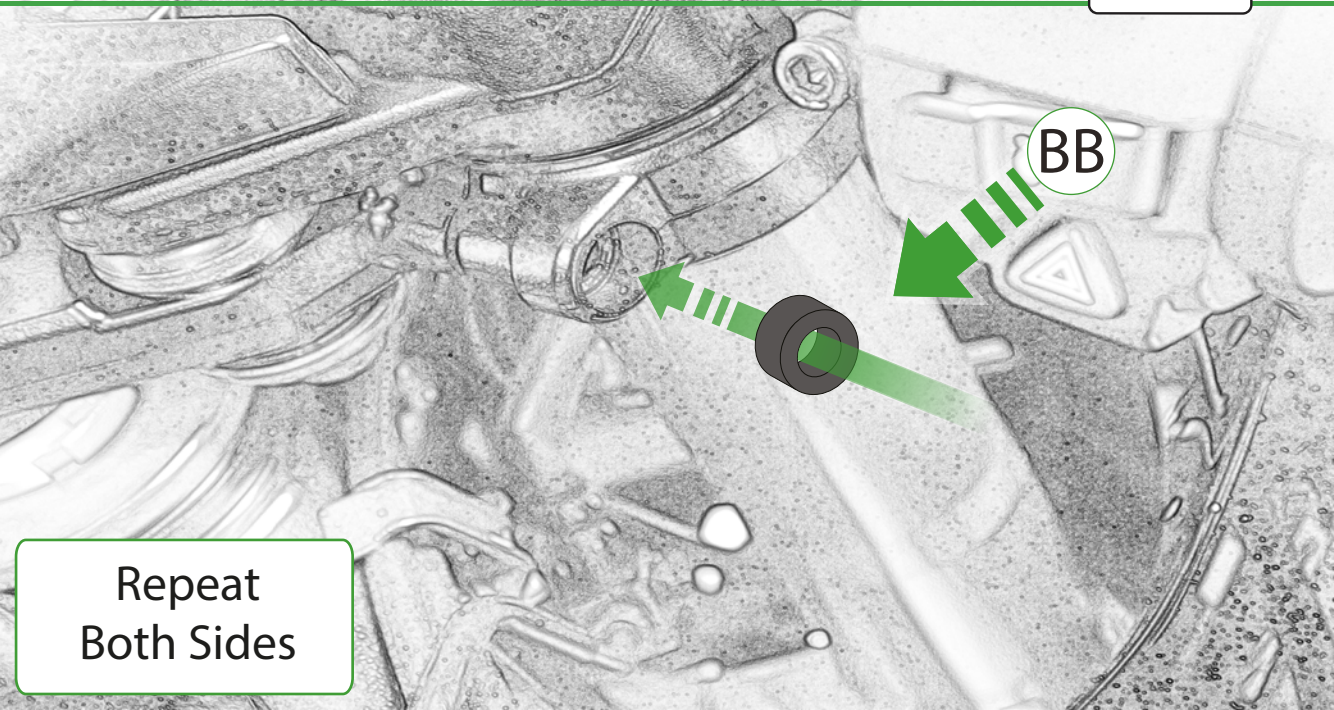


Repeat
Both Sides

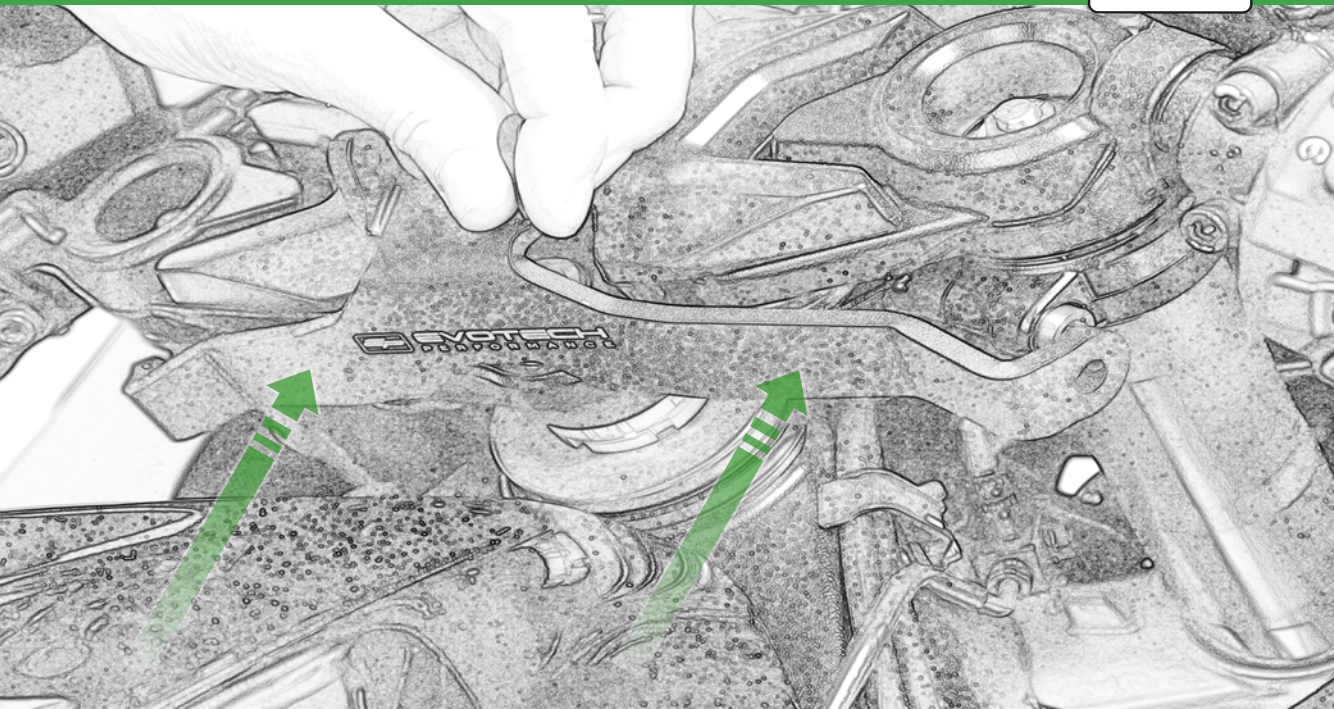

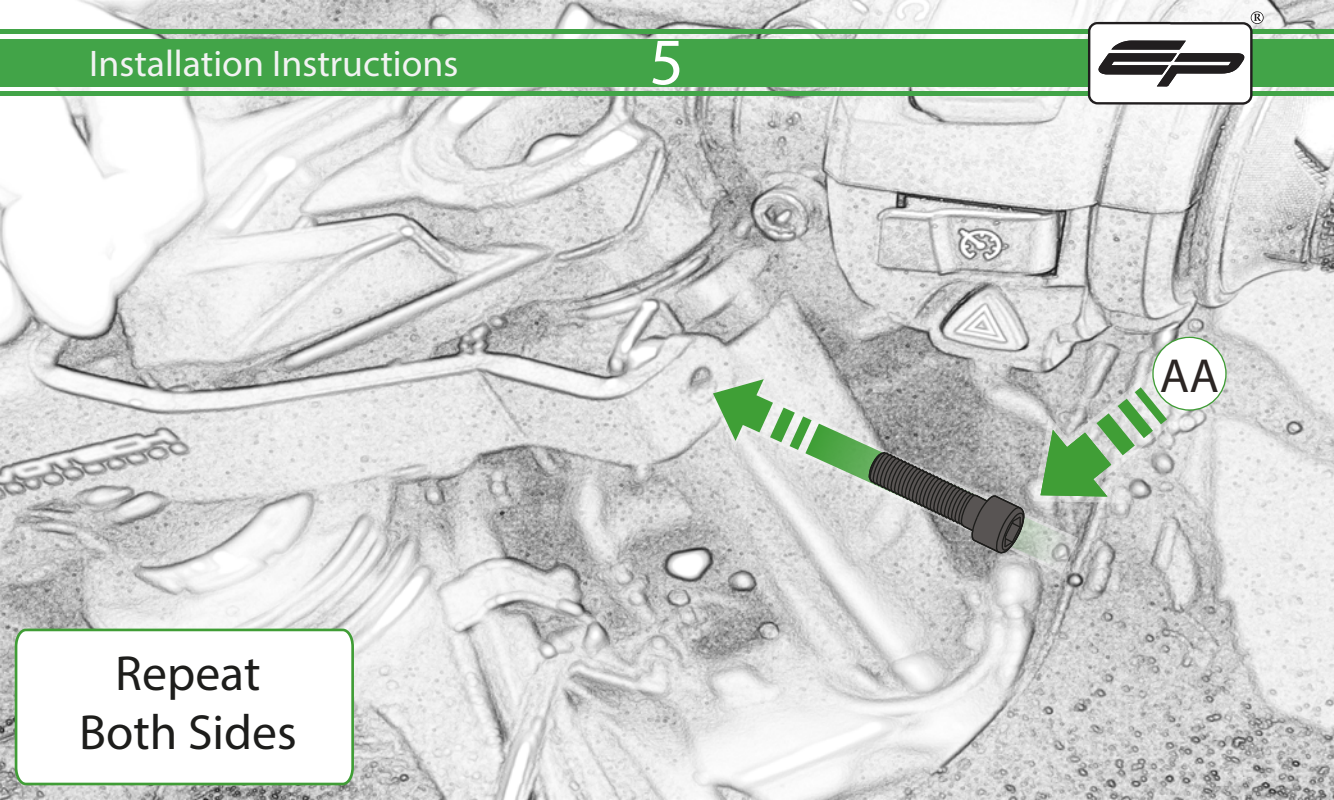

Repeat
Both Sides

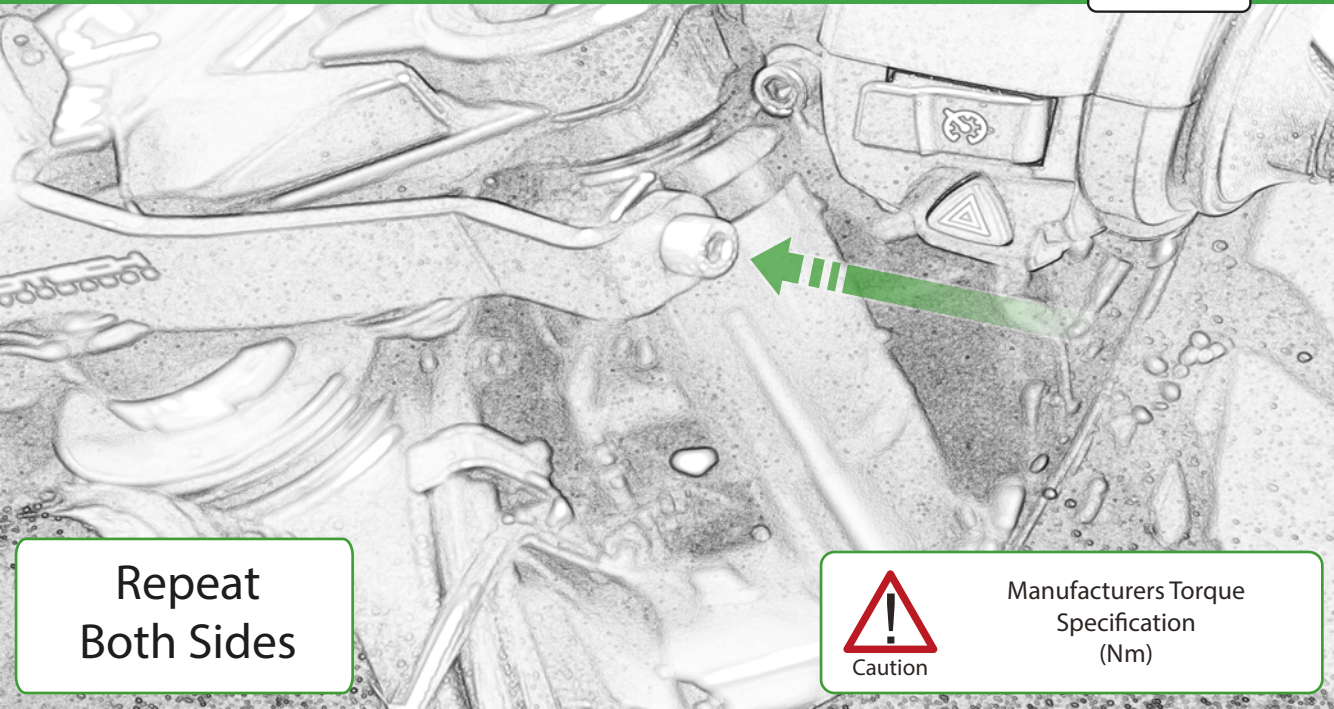


Repeat
Both Sides




Manufacturers Torque
Specification
(Nm)




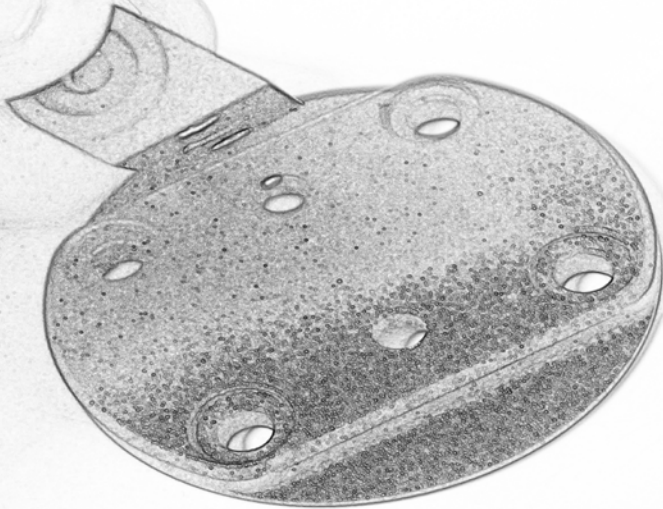





D

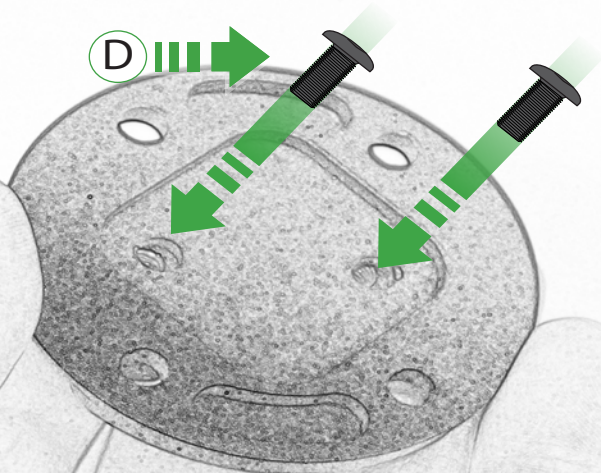


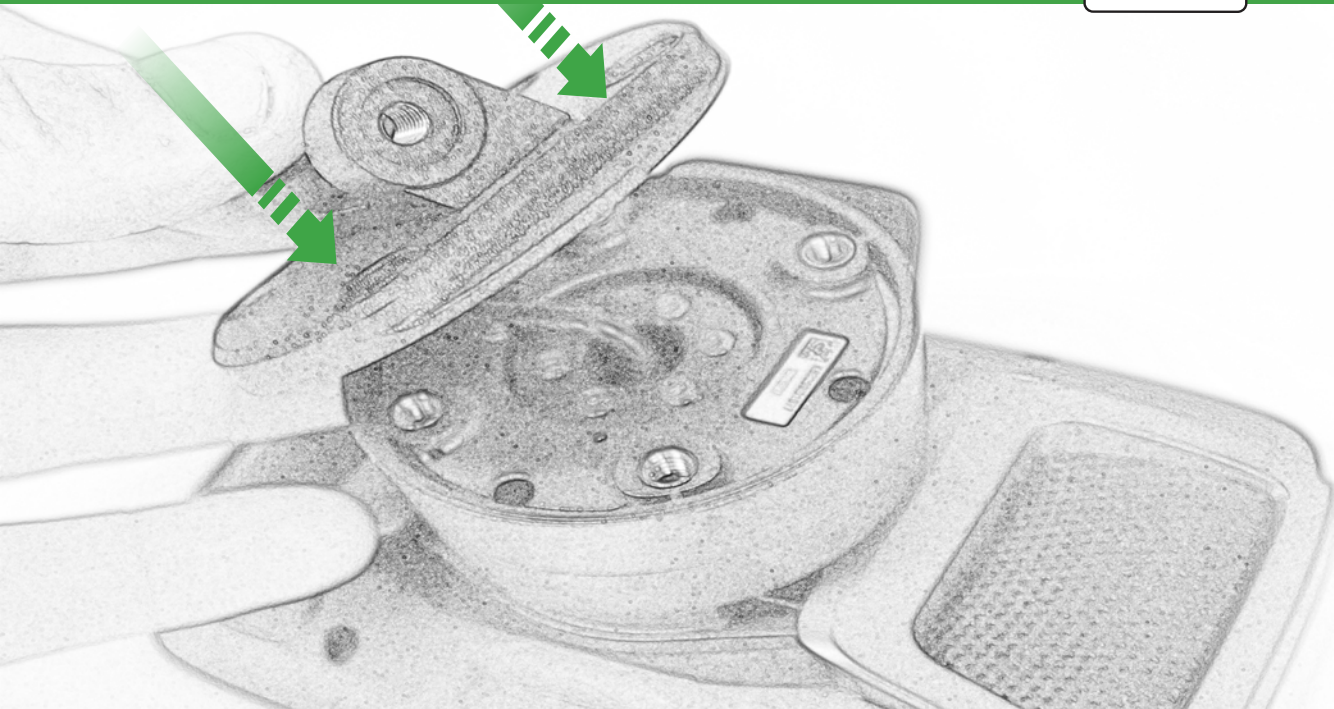


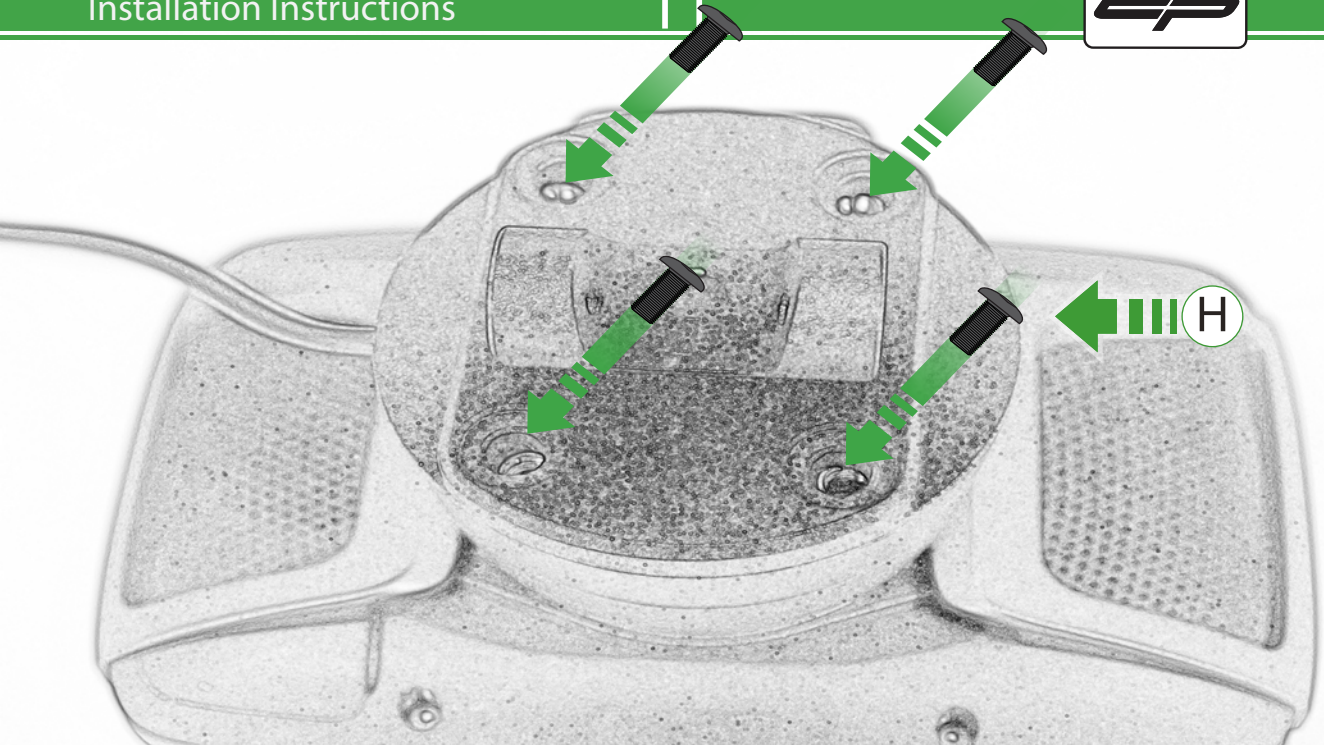

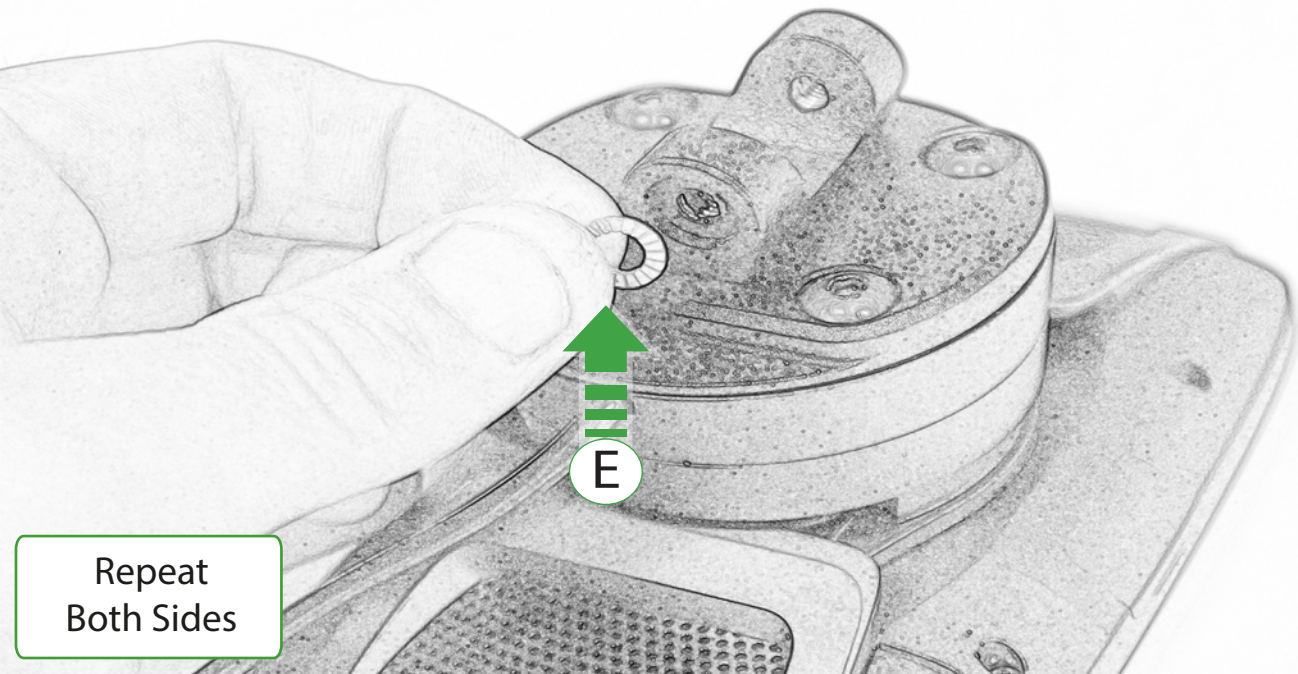

Repeat
Both Sides

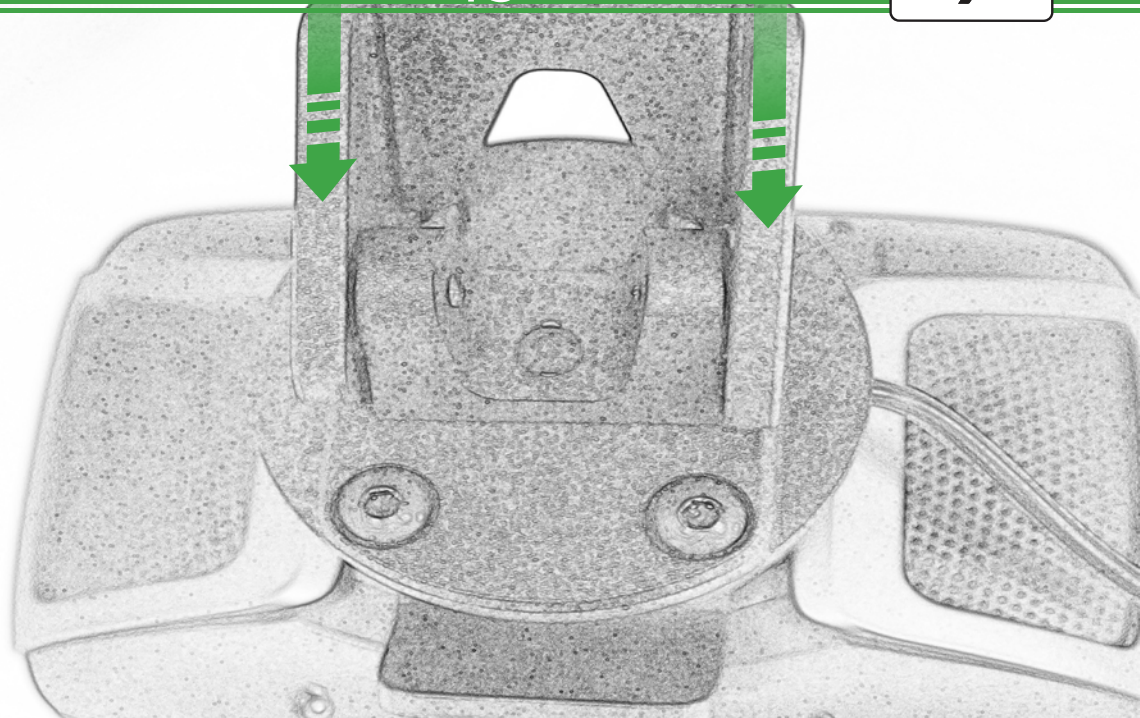

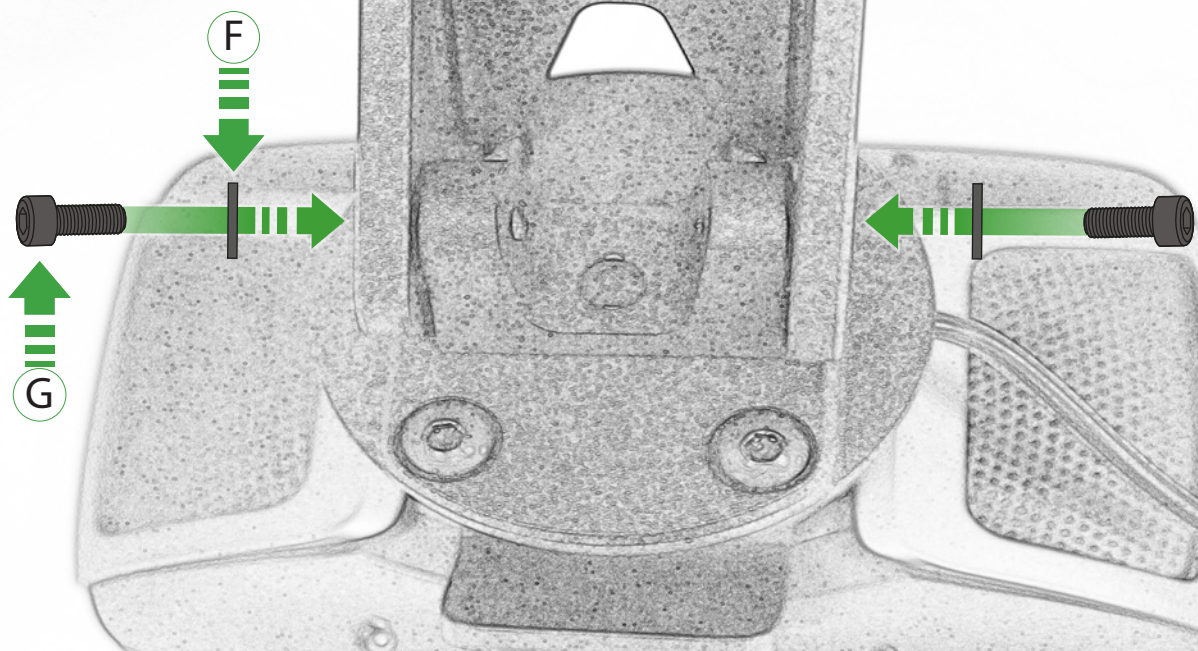



ESSENTIAL CHECKS



It is recommended that periodic inspections are made to ensure that all bolts are tightened to the specified torque settings.

Should the bike be involved in an accident a thorough inspection should be made and any components that have taken an impact, no matter how small, be replaced

EP PERFORMANCE



EVOTECH®
P E R F O R M A N C E

www.evotech-performance.com